


# SC3 Filament Winder Small-Scale Production

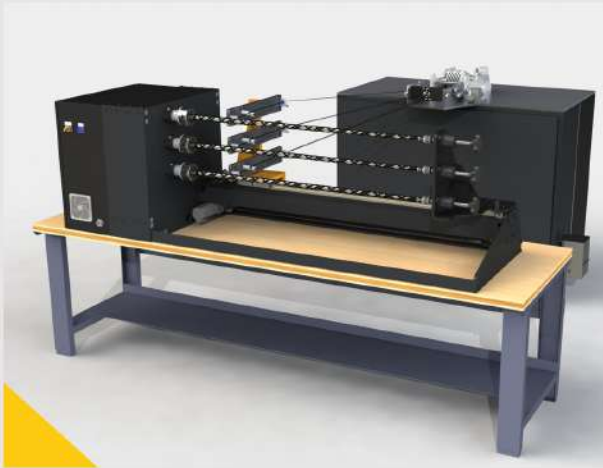

- Smallest multi-spindle filament winder
- Ideal for full-scale production of small parts
- 2 accurate axes of motion with adjustable tailstock
- Versatile wet winding or towpreg delivery system

## Specification

Maximum mandrel diameter: 4 inches

Carriage stroke: 40, 60, or 80 inches

Maximum mandrel weight (per spindle): 50 lbs

Number of spindles: 3

Number of axes: 2

Spindle speed: 150 RPM

Carriage speed: 40 inches/sec

Fiber system: wet winding or towpreg

Maximum fiber tension (Total): 50 lbs

Basic machine Size (L x W x H): 70 x 30 x 52 inches

The SC3 is part of the standardized filament winder portfolio which was designed with optimized price, reduced lead times, and trusted reliability in mind

The winder may be customized to any level of operational needs

